



# HS TIMBER GROUP

## HS Timber Group Romania

Quality class description

Pine (Pinus spp.)

April 2022

## MEASUREMENT GUIDELINES / DEFINITIONS (ACCORDING OEHHU 2006)

### Knots

The measurement is done on the point of the biggest diameter, without taking the starting yearings of the knot into consideration.

**Healthy knots** = are highly crooked with the surrounding wood mass.

**Dropping knot** = are not crooked with the surrounding wood mass; regularly with bark around the knot.



Healthy knot




Dropping knot

### Conicity, Taper

Conicity is a decreasing of the diameter with the length of the log.

Round wood is considered as conical when the diameter drops more than 1 cm per 1 running meter.

Conicity is **electronically** measured and given in cm/lfm. The measurement is done from the middle to the top of the log, so it is guaranteed that starting roots are unmeasured.

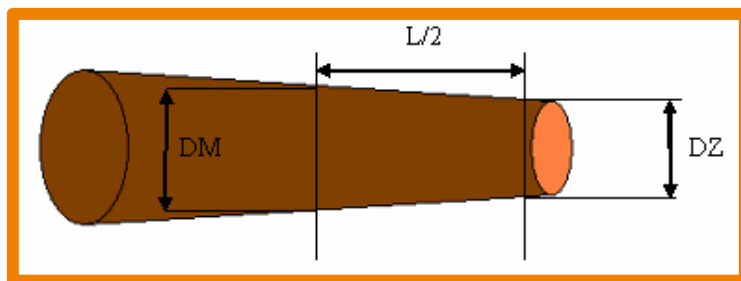

DZ – top diameter

DM – middle diameter

$$Taper = \frac{DM - DZ}{L/2}$$

## Spiral growth


Spiral growth is the screw-like course of the wood fiber around the rotation axis. It is given in cm/lfm or %.



## Curvature, Crookedness

Curvature is the deviation of the longitudinal axis from the straight line. The curvature is measured **electronically** and can be one- or two-sided.

One-sided curvature is defined with only one bending. Two-sided curvature can show two or more bends in one or multiple plans. The curvature is given in percent of the middle diameter to the reference line (yellow line).

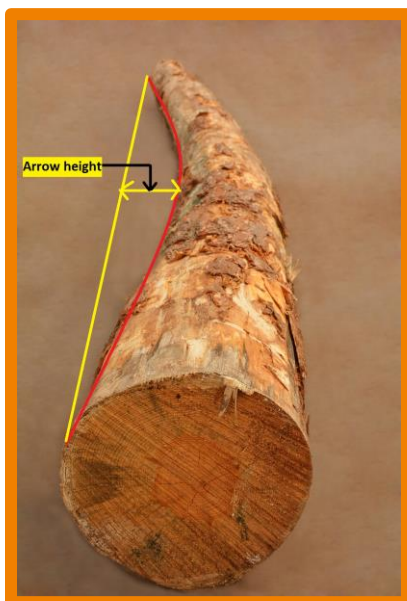

$$\text{Curvature} = \frac{\text{arrow height (Pfeilhöhe)}}{\text{Middle diameter}} * 100$$

## Compression wood („Buchs“)

Is a due to deposition of the tree built reaction wood and there is more lignin storage in the late wood than in a normal tree. It is characterized by a brown-red coloration, which is following the yearring. It is measured in percent of the visible surface.



## Cracks

Relevant are frontal and core cracks and also cracks on the lateral surface. Logs with just superficial frontal and core cracks are not downgraded, whereas logs with deep frontal and core cracks and also cracks on the lateral surface are downgraded.



*Crack on the lateral surface*



*Superficial frontal core crack*



## Insects

Relevant are beetles, lineatus and wood wasps.



## Colorations / rots

Relevant are blue stain and red stripes.



*Blue stain*



*Red stripes*

Rots are divided into hard- (nail-proof) and soft- (not nail-proof) rot.



*Nail proof*



*Not nail proof*

## Classes and limiting values AB, C, Cx

property	AB		C		Cx
	<i>MDM</i>	≤ 29 cm	≥ 30 cm	≤ 29 cm	≥ 30 cm
<b>Knots general</b>	Healthy knots up to 5 cm and dropping knots up to 3 cm diameter	Healthy knots up to 5 cm and dropping knots up to 3 cm diameter	Healthy knots up to 6 cm and dropping knots up to 4 cm diameter	Healthy knots up to 7 cm and dropping knots up to 5 cm diameter	Very prominent knotted pieces in combination with other properties e.g.: big taper allowed; the usage as sawable log must not be affected!
<b>Knots limited</b>	1 piece healthy knot with up to 8cm and 1 piece dropping knot with up to 5 cm per running meter	The amount of allowed knots is increasing by 50% (e.g.: 1.5 healthy knots with 5-8 cm	3 pieces healthy knots with up to 8 cm or 3 pieces dropping knots up to 6 cm per running meter pro lfm	3 pieces healthy knots with up to 9 cm or 3 pieces dropping knots up to 7 cm per running meter	
<b>Spiral growth</b>	Up to 5 cm per running meter	Up to 7 cm per running meter	Up to 8 cm per running meter	Up to 10 cm per running meter	Allowed
<b>Conicity</b>	Up to 1,5 cm per running meter allowed		Up to 2,5 cm per running meter allowed		Big taper allowed (max. 3,4 cm/lfm)
<b>Curvature</b>	One-sided curvature up to a deviation of 15% Two-sided curvature is not allowed		One-sided curvature up to a deviation of 19% Two-sided curvature up to 10%		One-sided 32% two-sided curvature 18%
<b>Compression wood</b>	Up to 10 % off the visible surface		Up to 10 % off the visible surface; prominent knotted pieces with more than 5 resin pouches max. 33%		Allowed
<b>Frontal-, core cracks</b>	Superficial frontal and core cracks, which are not getting deep into the wood are allowed		Superficial frontal and core cracks, which are not getting deep into the wood are allowed		Deep frontal cracks allowed
<b>Lateral surface cracks</b>	Not allowed		Not allowed		One crack on the lateral surface allowed
<b>Colorations</b>	Not allowed		Superficial beginnings of colorations are accepted		Allowed
<b>Rots</b>	Not allowed		Small brown spots (nail-proof) in the area of the roots accepted		Small brown spots (nail-proof) in the area of the roots accepted
<b>Insects</b>	Not allowed		Not allowed		Lineatus partly allowed

## Industrial round wood, IH

Logs which are not sawable must be classified as industrial round wood. Occasionally the classification as IRH is a combination of multiple mistakes of the wood.

For instance: Bifurcation, scorched pieces, wood with holes, logs with a high amount of soft rot, broken pieces und strong insect attacks.



## Special case resinated pine

If pine log is resinated just on one side and the rest of it is suitable for AB, the log will be classified as Cx.

If the pine log is resinated at two sides and / or the rest of the log is not suitable for AB, the log will be classified as IH.





## Contact



### SEBEȘ

Str. Industriilor nr. 1, 515800 Sebeș, jud. Alba, ROMÂNIA

Tel.: +40 258 806 300

Fax.: +40 258 806 301

sebes@hs.ro



### RECI

Comuna Reci nr. 673, 527145, jud. Covasna, ROMÂNIA

Tel.: +40 367 800 188

Fax.: +40 372 146 599

reci@hs.ro